PRESTAR MARKETING SDN BHD

198101010711 (76838-X)



PALLET TRUCK

MANUAL & ELECTRICAL

HOMEPAGE

FIND US

KL , PG , JB


STOCKY™

HYDRAULIC 3TON HAND PALLET JACK



TECHNICAL SPECIFICATION

MODEL		HP30SEB	HP30SE	HP30NR
Load Capacity	kg	3000		
Min Fork Height	mm	85		
Max Fork Height	mm	200		
Fork Width	mm	685	685	550
Fork Length	mm	1220	1220	1150
Steering Wheel	mm	Nylon Ø 180 x 50	PU Ø 180 x 50	
Single Load Wheel	mm	Nylon Ø 80 x 93	PU Ø 80 x 93	

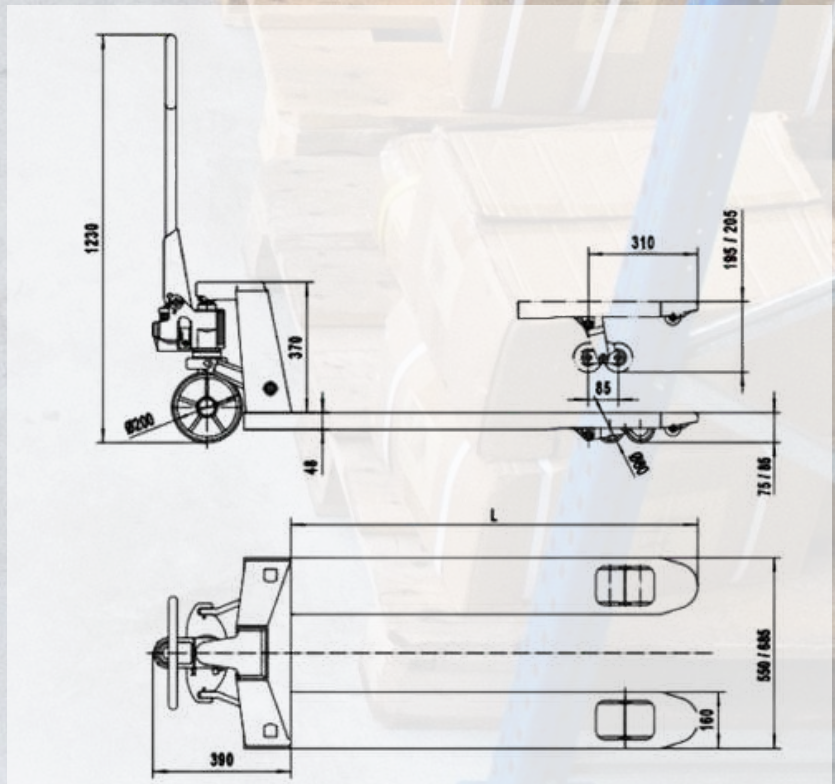

STOCKY™

INDUSTRY LEADING PALLET TRUCK

NEW STANDARD OF EFFORTLESS LOGISTICS

ENGINEERED TO OUTLAST PERFORMANCE

BUILT SIMILAR, HIGHER LEVEL PERFORMANCE





EFFORTLESS PU WHEEL STEERING



REINFORCED STRUCTURE




SINGLE CAST PUMP




DUAL WHEELS SMOOTH LOAD

TECHNICAL SPECIFICATION

MODEL		GHP30SE
Load Capacity	kg	3000
Pump Type		BF
Min Fork Height	mm	75
Max Fork Height	mm	195
Fork Width	mm	685
Fork Length	mm	1220
Fork Width	mm	160
Steering Wheel	mm	PU Ø 180 x 50
Single Load Wheel	mm	PU Ø 74 x 93
Steel Thickness Profile	mm	3.75
Net Weight	KG	71

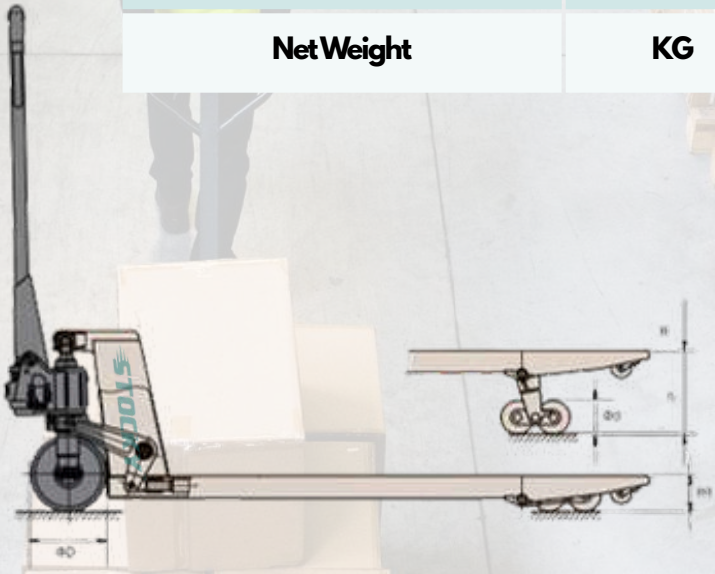

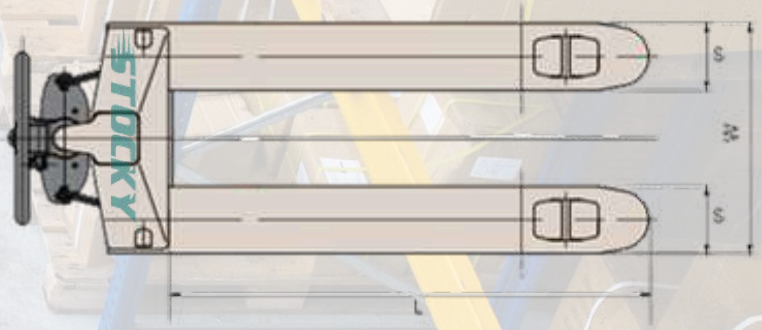

QUALITY ASSURANCE



- 100% pump inspection



- Robotic welding



- Automatic powder coating



- Assembly line



- Pre-delivery inspection

STOCKY™

HYDRAULIC SHORT FORK HAND PALLET JACK



TECHNICAL SPECIFICATION

MODEL		HP30NS	HP20SNR
Load Capacity	kg	3000	2000
Min Fork Height	mm	85	75
Max Fork Height	mm	200	190
Fork Width	mm	550	450
Fork Length	mm	900	1000
Steering Wheel	mm	PU Ø 180 x 50	
Single Load Wheel	mm	PU Ø 80 x 93	

STOCKY™

HYDRAULIC LOW PROFILE HAND PALLET JACK




TECHNICAL SPECIFICATION

MODEL		HP20LBSE	HP20LBNR
Load Capacity	kg	2000	
Min Fork Height	mm	51	
Max Fork Height	mm	165	165
Fork Width	mm	685	550
Fork Length	mm	1220	1150
Steering Wheel	mm	PU Ø 180 x 50	
Tandem Load Wheel	mm	PU Ø 50 x 70	

STOCKY™

HYDRAULIC SUPER LONG FORK HAND PALLET JACK

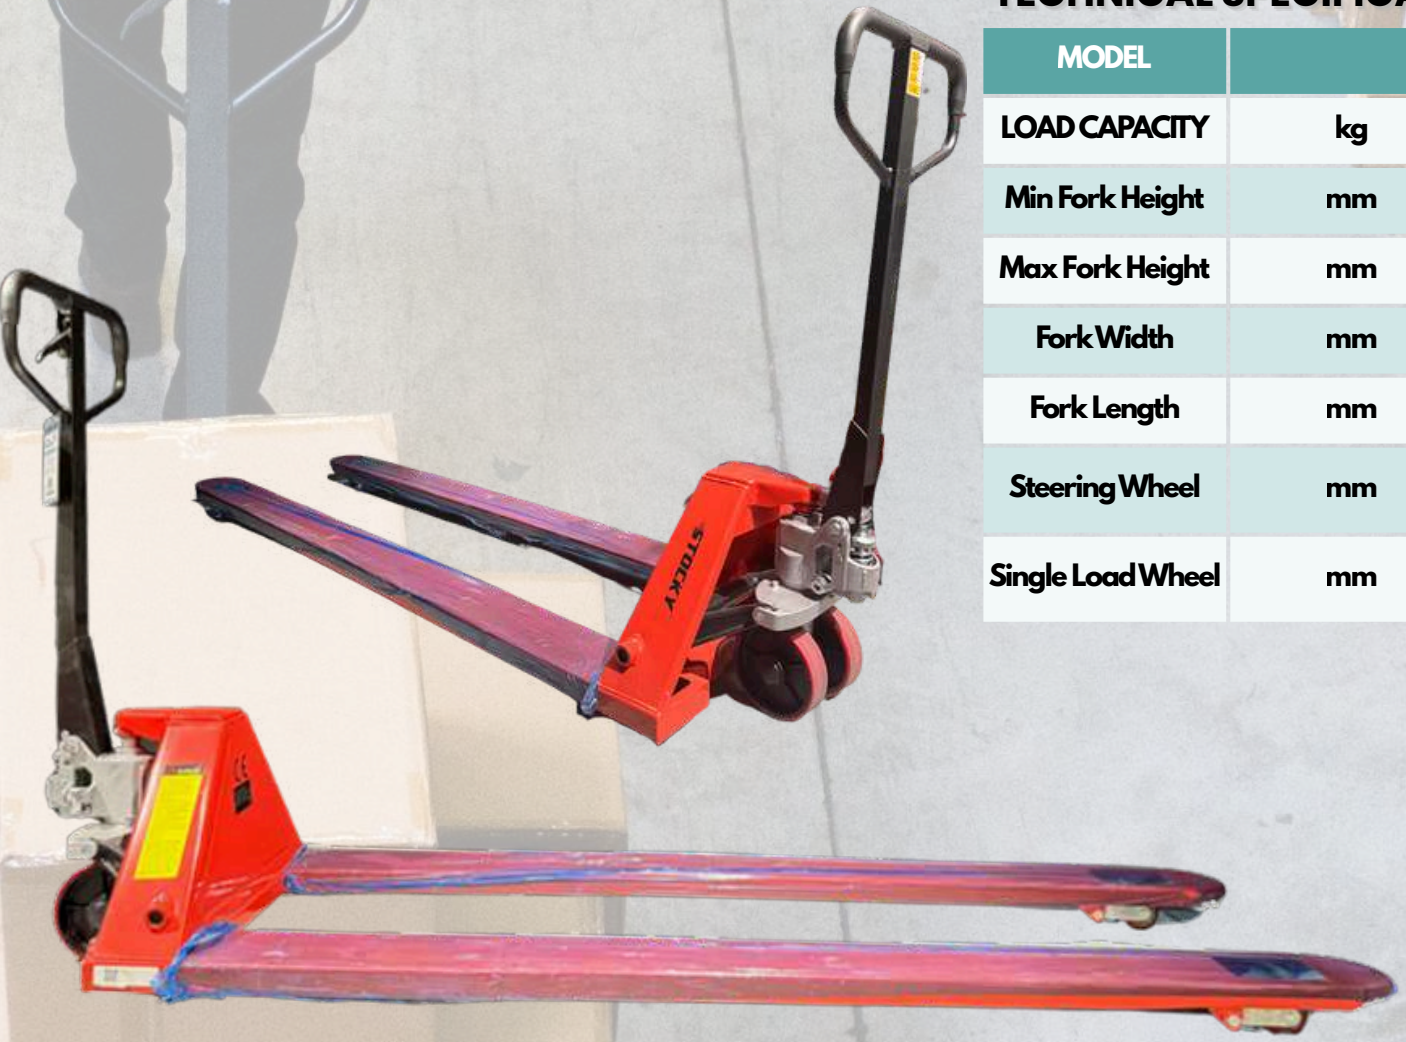

TECHNICAL SPECIFICATION

MODEL		S02-SPL3015	S02-SPL3018	S02-SPL3020SE
LOAD CAPACITY	kg	3000		
Min Fork Height	mm	85		
Max Fork Height	mm	200		
Fork Width	mm	685	685	685
Fork Length	mm	1500	1800	2000
Steering Wheel	mm	PU Ø 160 x 50		
Single Load Wheel	mm	PU Ø 74 x 93		

STOCKY™

HYDRAULIC 5 TON HAND PALLET JACK



TECHNICAL SPECIFICATION

MODEL		HP50SE	HP50NR
LOAD CAPACITY	kg	5000	
Min Fork Height	mm	85	
Max Fork Height	mm	200	
Fork Width	mm	685	550
Fork Length	mm	1220	1150
Steering Wheel	mm	Nylon Ø 180x50	
Tandem Load Wheel	mm	Nylon Ø 80x70	

STOCKY™

STAINLESS STEEL HAND PALLET JACK



TECHNICAL SPECIFICATION

MODEL		SS20SE	SS20NR
LOAD CAPACITY	kg	2000	
Min Fork Height	mm	85	
Max Fork Height	mm	200	
Fork Width (Outer)	mm	685	550
Fork Width (Inner)	mm	365	230
Fork Dimension	mm	50 x 160 x 1220	50 x 160 x 1150
Overall Length	mm	1315 - 1620	
Overall Height	mm	1245	
Steering Wheel	mm	Nylon Ø 180 x 50	
Single Load Wheel	mm	Nylon Ø 80 x 93	
Net Weight	kg	72	68

STOCKY™


WEIGHTED SCALE HAND PALLET TRUCK



ACCESSORIES : PRINTER

TECHNICAL SPECIFICATION

MODEL		S02-SHPT20H-SE	S02-SHPT20H-NR
LOAD CAPACITY	kg	2000	
Max.height	mm	200	
Min.height	mm	85	85
Fork size	mm	1220	1150
Fork overall size	mm	685	550
Roller Size	mm	Ø 80x70 , Ø 80x93 Polyurethane (PU)	
Steering wheel size	mm	Ø200 Polyurethane (PU)	
Weighing accuracy	kg	±0.5kg	
Operating Environment		-10°C-40°C(14°F to 104°F)	

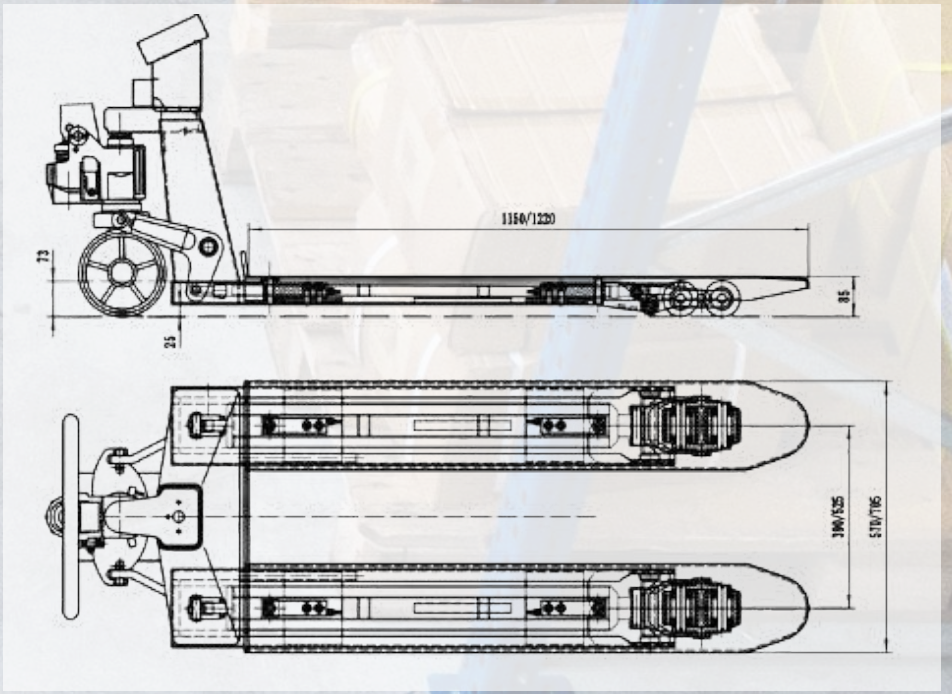

STOCKY™

ELECTRICAL PALLET JACK

2 TON PERFORMANCE

DRIVEN BY LI-ION ENERGY

LET ELECTRICITY DO THE LIFTING





PROTECTOR COVER



PU TANDEM WHEEL



REPLACEABLE BATTERY

ONE CONTROL PANEL MAXIMUM EFFICIENCY



- Pin-code handle (For option)






EMERGENCY BUTTON

TECHNICAL SPECIFICATION

ITEM		S02-SEPT20SE	S02-SEPT20NR
Drive Mode		Electrical Drive	
Operator Type		PEDESTRIAN	
Load Capacity	kg	2000	
Load Centre	mm	600	
Load Distance	mm	950	
Wheelbase	mm	1270	
Weight without Battery	kg	142	
Wheel type		PU	
Drive Wheel	Ø x W, mm	Ø210 × 75	
Front Wheel	Ø x W, mm	Ø80 × 70	
Wheel numbers (front/rear)		1 x 4	
Thread, Front	b11, mm	390/525	
Lifting Height	h3, mm	195	
Height of tiller in drive position min/max	h14, mm	585 /1250	
Height, lowered	h13, mm	85	
Overall Length	l1, mm	1620	
Length of face of fork	mm	470	
Overall Width	b1 b2, mm	680	560
Fork Dimension	s/e/l, mm	50 / 160 / 1150	
Width Across Fork	b5, mm	680	550
Ground Clearance	m2, mm	35	
Aisle Width for Pallet 1000 x 1200 Aisle Width for Pallet 800 x 1200	Ast , mm	1820 1870	
Turning Radius	Wa , mm	1380	
Travel Speed Laden / Unladen	km/h	4.2 / 4.5	
Max Gradeability Laden / Unladen	%	6 / 10	
Brake Type		Electromagnetic	
Drive Motor Power	kw	0.75	
Lift Motor Power	kw	0.8	
Battery acc. to DIN 43531/35/36 A, B, C, no		no	
Battery Voltage	V / Ah	24 / 20	
Battery Weight (+ / - 5%)	kg	5.5	
Type of Drive Control		DC Speed Control	
Sound Level at Driver's Acc to EN12053	db / A	< 70	
Steering Mode		Mechanical Steering	

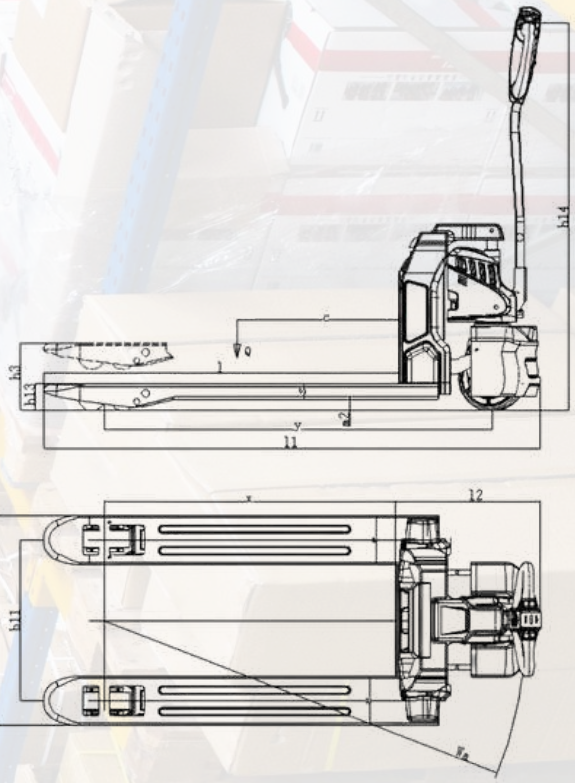



STOCKY™

ELECTRICAL PALLET JACK

HEAVY DUTY 2 TON PERFORMANCE

ADVANCED LI-ION ENERGY

SMARTER UPGRADE





PROTECTOR COVER



PU TANDEM WHEEL



REPLACEABLE BATTERY

ONE CONTROL PANEL MAXIMUM EFFICIENCY



- Pin-code handle (For option)






EMERGENCY BUTTON


STOCKY™

ELECTRICAL PALLET JACK

TECHNICAL SPECIFICATION

ITEM		FEP20SE	FEP20NR
Drive Mode		Electrical Drive	
Operator Type		Walking Operation	
Load Capacity	kg	2000	
Load Centre	mm	600	
Load Distance	mm	840/910	
Wheelbase	mm	1220	
Weight	kg	140	
Wheel type		PU	
Drive Wheel	mm		
Rear wheel size (single)	mm	Ø80 × 93	
Tandem size, rear wheel	mm	Ø80 × 70	
Wheel numbers (front/rear)		1/2 (single) 4 (tandem)	
Wheel tread, rear wheel	mm	400 / 520	
Lifting Height	mm	105 / 115	
Height of tiller in drive position (min/max)	mm	800 - 1240	
Height when lowered	mm	75 / 85	
Overall Length	mm	1610	1540
Fork Length	mm	1220	1150
Overall Width	mm	680	560
Fork Dimension	mm	50* 160 * 1220	50* 160 * 1150
Overall Width of Fork	mm	680	560
Minumum Ground Clearance	mm	30	
Turning Radius	mm	1350	
Travel Speed Laden / Unladen	km/h	4.5	
Turtle Speed	km/h	2.25	
Lifting Speed Laden / Unladen	m/s	17-22	
Lowering Speed Laden / Unladen	m/s	26-30	
Max Gradeability Laden / Unladen	%	6/10	
Brake Type		Electromagnetic	
Drive Motor Power	kw	0.85	
Lift Motor Power	kw	0.6	
Battery Voltage	V/Ah	48V/ 15Ah	
Battery Weight	kg	4.5	
Charger	V/A	48/6	
Charging Time	H	2.5	

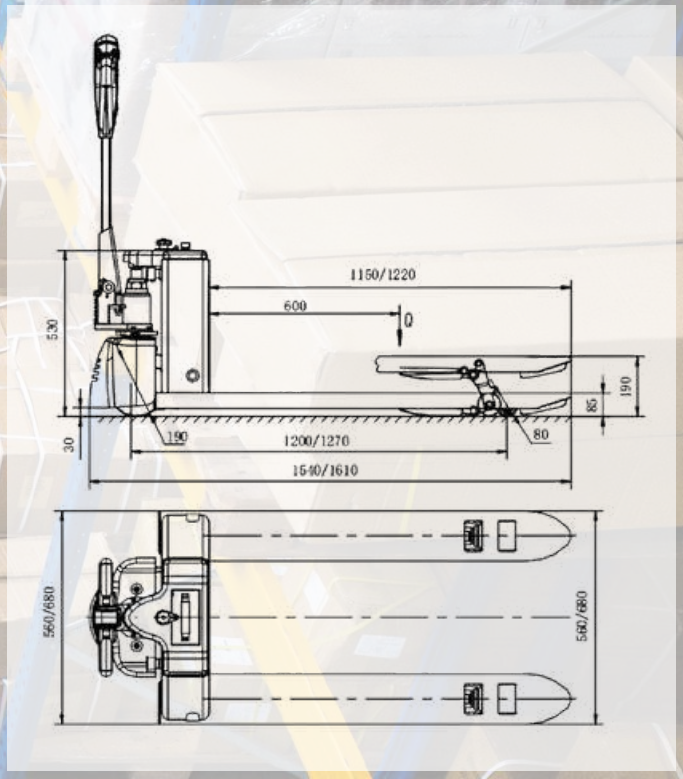

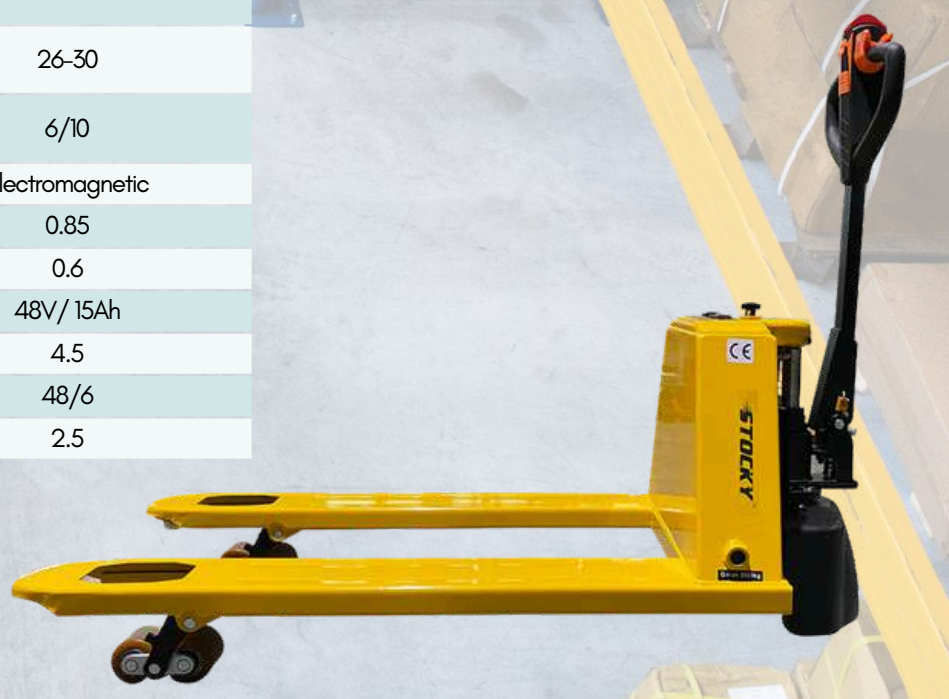

STOCKY™

RIDER ON ELECTRICAL PALLET TRUCK

HEAVY LIFTER UP TO 3 TON

LOGISTICS HUB MVP

ERGONOMICS WORK DESIGN

ENGINEERED FOR LONG DISTANCE





FOLDABLE PLATFORM



SAFETY ARM SUPPORT

ONE CONTROL PANEL MAXIMUM EFFICIENCY





EMERGENCY SWITCH & BATTERY INDICATOR



ACCESSORY GUARD

TECHNICAL SPECIFICATION

ITEM		STOCKY PLATFORM PALLET TRUCK S02-SPPT	
Drive Mode		Electrical Drive	
Operator Type		Station Drive	
Load Capacity	kg	2000/ 2500 / 3000	
Load Centre	mm	600	
Net Weight (With Battery)	kg	810	
Wheel Material		PU	
Front Wheel Size	mm	Ø80 × 70	
Rear Wheel Size	mm	Ø115 × 55	
Drive Wheel	mm	Ø250 × 80	
Rear wheel distance , b11	b11, mm	625	
Wheel Base	Y, mm	1500	
Lifting Height	h3, mm	120	
Vehicle Height	h1, mm	1450	
Max Lifted Height	h4, mm	205	
Lowered Height	h13, mm	85	
Overall Length	l1, mm	1930	
Overall Width	b1, mm	820	
Dimension of Fork	s/e/l, mm	50 / 176 / 1150	
Overall Width of Fork	b5, mm	685	560
Minimum Ground Clearance	m2, mm	30	
Aisle Width for Pallet 1000 x 1200 Crossway Aisle Width for Pallet 800 x 1200 Crossway	mm	2130 2180	
Minumum Ground Clearance	mm	30	
Turning Radius	Wa ,mm	1750	
Travel Speed Laden / Unladen	km/h	5.5./ 5.8	
Lifting Speed Laden / Unladen	m/s	0.04 / 0.05	
Lowering Speed Laden / Unladen	m/s	0.06 / 0.05	
Max Gradeability Laden / Unladen	%	8 / 20	
Brake Type		Electromagnetic	
Drive Motor Power / Lift Motor Power	kw	1.5 / 1.5 / 2.2 (AC) /2.2	
Battery Capacity	V/Ah	24 /210 (270)	
Battery Weight	kg	200/ 260	
Steering Mode	V/Ah	Electric Steering	
Sound Level at Driver (EN 12053)	dB (A)	<70	

